

Ö1 Edition Turntable

Special Edition

MSRP 599 € (incl. VAT)

- Special Ö1 plinth design
- Pre-adjusted Pick it MM EVO cartridge
- 1,7kg aluminium platter with TPE damping
- Low-friction, precision tonearm bearing
- TPE damped counterweight
- 8,6" one-piece aluminium tonearm
- Sophisticated motor suspension
- Electronic speed switch
- Precision belt drive with electronic speed control
- 8x hand-painted MDF chassis
- Premium semi-symmetrical phono cable
- Gold plated RCA connectors
- Premium acrylic dust cover included
- Handmade in Europe

Speed: 33, 45 (electronic speed change)
Drive principle: belt drive with electronic speed control
Platter: 300mm, die cast aluminium platter with TPE damping and felt mat
Platter bearing: stainless steel axle in bronze bushing
Wow & flutter: 33: +/-0,16%; 45: +/-0,14%
Speed drift: 33: +/-0,40%; 45: +/-0,50%
Signal to noise: 65dB
Tonearm: 8,6" one-piece aluminium tonearm
Effective arm length/mass: 218,5 mm / 8 g
Overhang: 18,5mm
Included accessories: 15V DC / 0,8A power supply, dust cover, 7'' single adapter
Power consumption: 4W / 0W standby
Dimensions: 415 x 113 x 320mm (WxHxD)
Weight: 5,3 kg net

Premium Tonearm

The Ö1 Edition Turntable features a premium 8,6" aluminium tonearm with a solid aluminium bearing construction. The low friction tonearm bearing guarantees precise, stable and accurate tracking.

The one-piece arm and headshell design prevents unwanted resonances and offers a solid physical bond to the cartridge.

The TPE damped counterweight reduces arm-cartridge resonances by as much as 50%.

This superb built tonearm delivers an insane sound quality with a convincing sound stage.





Heavy damped aluminium platter


The heavy 1,7 kg die-cast aluminum platter gets reworked and precision balanced in an extra step to obtain a perfect platter.

The heavy aluminum platter has a ring made of TPE (thermoplastic elastomer) on the inside that helps to dampen all resonances and thus minimize wow and flutter.

The platter is anti-magnetic, which allows you to use MC cartridges and upgrade to our True Balanced Connection technology.

Our separately available Record Puck E provides an extra level of damping and stability, so it is the perfect add-on for your Ö1 Edition Turntable.

1,7kg die-cast aluminium

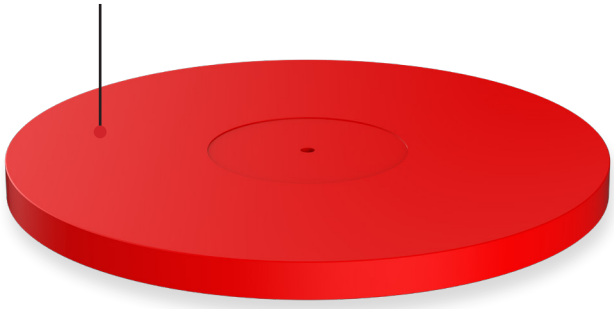


Top view

TPE damping ring



Bottom view

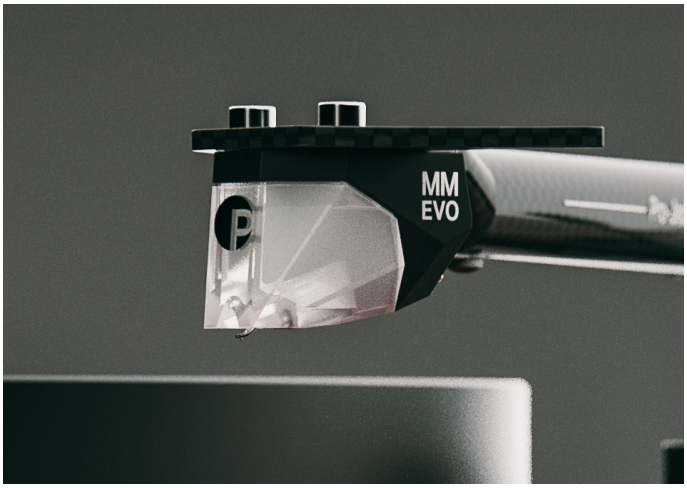

The Pick it MM EVO

The superior high dynamic 7mV output Pick it MM EVO cartridge completes the Ö1 Edition Turntable in all respects. It doesn't only complement the lightweight tonearm sound-wise, it also looks stunning on the turntable.

Our phono specialists again teamed up with the cartridge experts at Ortofon from Denmark to work on this new cartridge. The cartridge is made from a unique combination of technologies. One of which is Ortofon's well known split pole pins. This enables it to have a flat frequency response, which is comparable to MC cartridges.

The Perfect Connection

A high-quality cable carries the full signal intact, down to the smallest detail, so your system can perform at its best.

The included Connect it Phono E RCA is a high quality phono optimized cable. We focused on quality core materials like a copper conductor for a lossless signal transmission.


Upgrade to TRUE BALANCED

Use your turntable in balanced configuration to ignite the full potential!

Get your True Balanced cable now!

Contact your dealer for more information or go to:

www.project-audio.com/connect-it

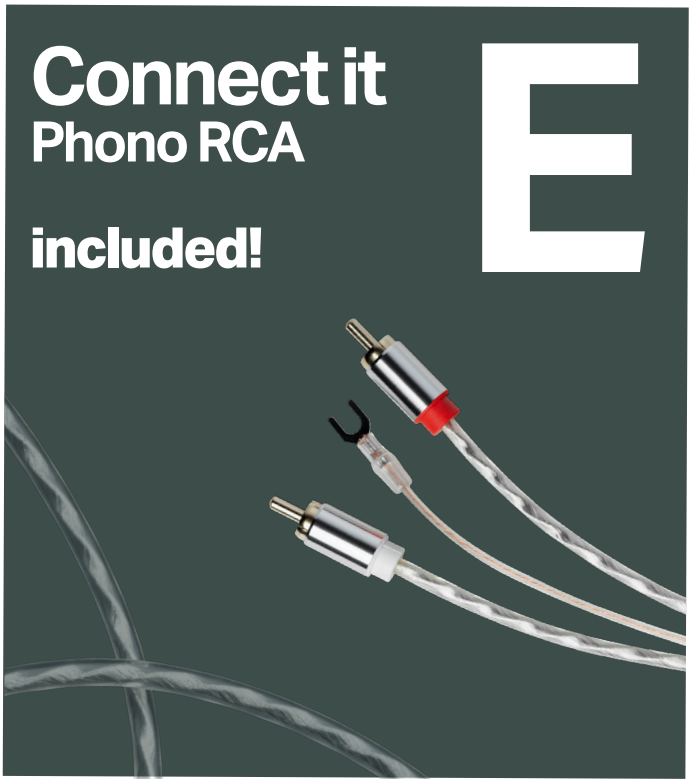

**To use our True Balanced Connection, your Ö1 Edition turntable needs to be equipped with an MC cartridge or Pick it PRO Balanced.*



Phono Box S3 B




Phono Box DS3 B

Sophisticated DC/AC power generator

The Ö1 Edition Turntable uses a premium Pro-Ject AC motor driven by a precision DC/AC generator. An AC synchronous motor runs at a speed set by the frequency of its power supply, so its accuracy depends on how clean and stable that supply is. Household mains power often isn't: voltage and frequency drift, and noise from other appliances can get into the motor.

The generator solves this by converting the DC input into its own clean, precisely controlled AC signal for the motor. The motor runs independently of the quality of your mains supply, with constant speed, very low vibration and quiet operation.

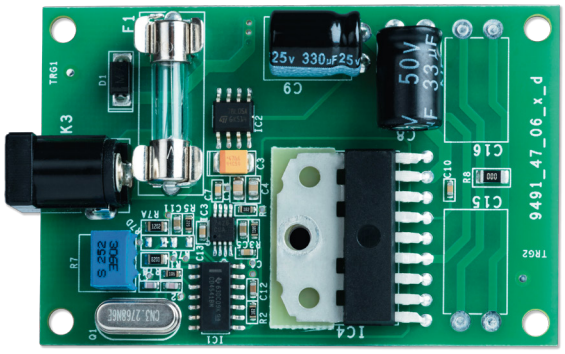

Acrylic dustcover included

Holds in every opening position & can be removed easily if needed.

